PRODUCT INFORMATION

Description 12-24V DOT LED High & Low Beam

Headlight with Black Inner Bezel - Single

Light

 Height
 176.53 mm / 6.95 in

 Width
 176.53 mm / 6.95 in

 Depth
 99.82 mm / 3.93 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Die-Cast Aluminum

Housing Color Gray
Bezel Color Black

Retrofits 2D1 "PAR56" or 7" round headlights

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating 65 °C / 149 °F


Temperature

Connector or Wiring H4


Mating ConnectorH4 AMP#172615-2Product Weight2.31 lbs / 1.05 kgsShipping Weight3.50 lbs / 1.59 kgs







PRODUCT DIMENSIONS

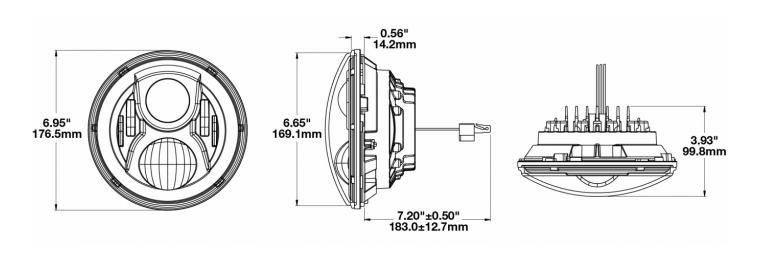

ELECTRICAL SPECIFICATIONS


Input Voltage12-24V DCOperating Voltage9-32V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Black WireGroundWhite WireHigh BeamYellow WireLow Beam

Current Draw 3.50A @ 12V DC (High Beam)

2.00A @ 12V DC (Low Beam) 1.80A @ 24V DC (High Beam) 1.10A @ 24V DC (Low Beam)



REGULATORY STANDARDS COMPLIANCE









Buy America Standards FMVSS 108 s10.1 (Table XIX) IEC IP67

Eco Friendly FMVSS 108 s10.1 (Table XVIII)

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3,200 (High Beam); 1,770(Low

Beam)

Effective Lumen

Output

1,260 (High Beam); 750 (Low Beam)

Candela Output 71,500 (High Beam) 35,003 (Low

Beam) 5000 K

Nominal LED Color


Temperature


Beam Pattern(s)

(DOT)

Forward Lighting - Low Beam (DOT)

Forward Lighting - High Beam

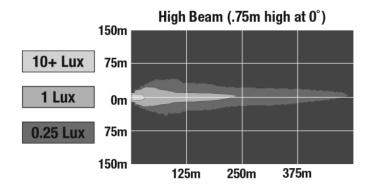

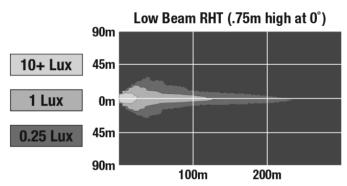

APPLICATIONS

















ADDITIONAL INFORMATION

Headlight must be securely mounted and properly aimed such that the beam pattern cut off line complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.

PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



ACCESSORIES



<u>Part Number</u> <u>8000381</u>

H4/H4 Anti-Flicker Harness for J.W. Speaker LED headlights



<u>Part Number</u> 3156351

Mounting Ring Kit for 7" Round (PAR56) Headlights



Part Number 3266081

Jumper Harness H4/H13 for 8700 Evolution & 8710 Series



Part Number 8000311

Anti-Flicker Harness H4/H13 for 8700 Evolution Series Headlights



Part Number 8200411

Wire Harness H4 for 7" Round (PAR56) Headlights



Part Number 8200791

Thomas Built Bus 7inch Headlight Mounting Kit



RELATED PRODUCTS



Part Number 0554961

12-24V DOT LED High & Low Beam Headlight with Chrome Inner Bezel - Single Light



Part Number 0554981

12-24V DOT LED High & Low Beam Headlight with Black Inner Bezel & Mounting Ring -Single Light



<u>Part Number</u> 0554991

12-24V DOT LED High & Low Beam Headlight with Chrome Inner Bezel & Mounting Ring - Single Light



Part Number 0556281

12-24V DOT LED High & Low Beam Heated Headlight with Black Inner Bezel - Single Light



<u>Part Number</u> 0556291

12-24V DOT LED High & Low Beam Heated Headlight with Chrome Inner Bezel - Single Light



Part Number 0556301

12-24V ECE LED RHT High & Low Beam Heated Headlight with Black Inner Bezel -Single Light



<u>Part Number</u> <u>0556311</u>

12-24V ECE LED RHT High & Low Beam Heated Headlight with Chrome Inner Bezel -Single Light



<u>Part Number</u> 0556321

12-24V ECE LED LHT High & Low Beam Heated Headlight with Black Inner Bezel -Single Light

