

## Warranty and Disclaimer

All XK Glow mounting brackets come with a Limited Lifetime structural warranty to the original purchaser. Within One year after the purchase date, the original buyer may return any XKGLOW products that have any finish imperfections due to a defect in materials or workmanship. Finish imperfections from impacts to the piece such as rock chips or abrasions will not be considered defective. Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

## Additional Disclaimer Terms

- Please check your local and state laws for the proper use of this product.
- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
  - Improperly installed product may cause injury to persons.
  - It is recommended that the kit should be installed by a licensed professional.
  - XKGLOW assumes no liability for the installation of the product.
  - Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.

## Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xkglow@gmail.com. We normally respond within 24 hours. (Monday-Friday).

## Installation Instructions

### 1. Removing Factory Hardware and Installing the Mounts

Using the Factory supplied tool kit from your Jeep, carefully remove the hood hinge fasteners shown in **Example 1**. Once removed, locate the 4 supplied stainless fasteners and 8 rubber washers included with this mount kit. Two rubber washers will go in between the mount and the factory hinge on each fastener. At this time install all 4 fasteners but do not fully tighten at this time. If you are installing these brackets on a Wrangler JK (years 2007-18 no vent on front fender) you will need to install the adapter plate shown in **Example 3**. This adapter plate widens the the JK hinge mounting surface to the JL/JT Specifications.


**Example 1**



**Example 2**



**Example 3**

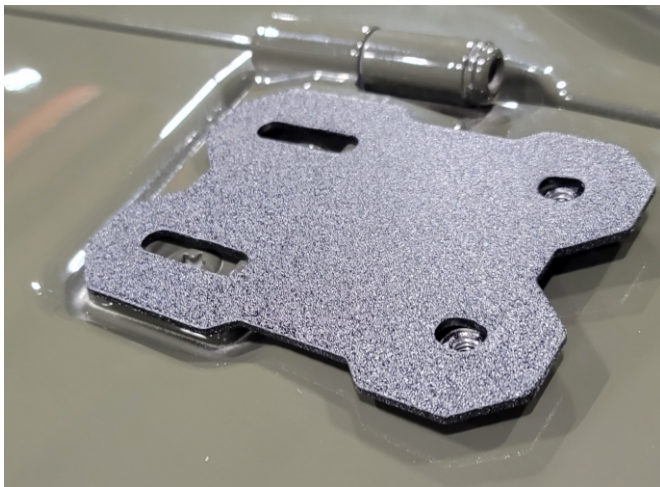

**Example 4**



### 2. Mounting of Lightbar

Once the 4 fasteners are installed finger tight, it's time to mount the light bar and center the mounts. Place the light bar into the bracket and install the light bar's included fasteners, but only finger tight. Now that the mounts are spaced for your light bar its time to center the mounts between the hinges and tighten the hinge fasteners to factory specifications. Once tightened now is the perfect time to adjust your light bar height. When ready, tighten the fasteners securing your light bar in the desired position. The final product should be similar to the photo in **Example 2** on the JL/JT and similar to **Example 4** on the JK.